


ELLIX 10 to SAM4s ER-5200M Series

Cable & Connections

ECR DB-9M		Printer RJ-45	
N.C.	1	1	+VCC
RXD	2	2	DSR
TXD	3	3	TXD
DTR	4	4	RXD
SGND	5	5	RTS
DSR	6	6	CTS
RTS	7	7	GND
CTS	8	8	DTR
N.C.	9	9	RI
FGND			FGND

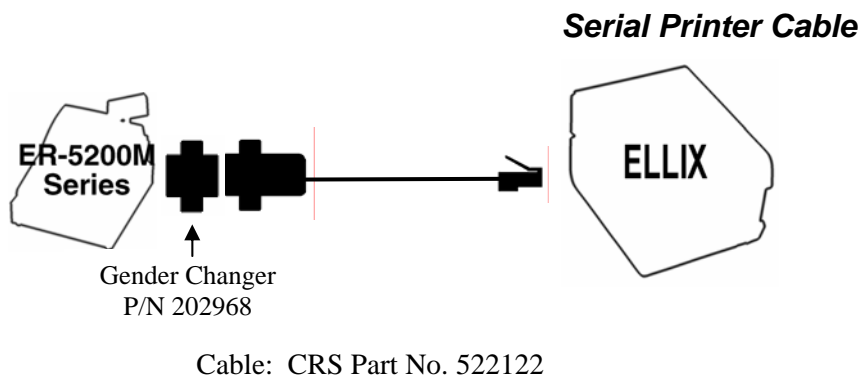

DIP Switch Settings

SW1	ON						X	
	X	X	X	X	X	X		X
	1	2	3	4	5	6	7	8

1	OFF (Data receive error: OFF=Print "?")
2	OFF (Handshaking: OFF=DTR/DSR)
3	OFF (Word Length: OFF=8 bits)
4	OFF (Parity Check: OFF=No)
5	OFF (Parity Selection)
6	OFF (BAUD=19,200)
7	ON (BAUD=19,200)
8	OFF (Memory Switch selection: OFF= MSW 1)

Special Instructions

1. If using ER-5200M Series software version 5.2 or later, use device selections for ELLIX 10 in "RS232C Port Options". If using earlier version software use "SRP-100" or "SRP-270" selections.
2. Set Serial Port Parameters to match the settings of the Ellix 10. Recommended setting are: BAUD= 19,200, PARITY CHECK=NONE, DATA BITS=8 and STOP BITS=1. For maximum printer efficiency, use the highest BAUD rate available: 19,200.