



*Theater Concessions / Ticket Booths / Box Offices*



*Dusty Environments Like Pizza and Bakeries*



*Cafeterias / Quick Service Restaurants*



*Tobacco Stores / Bars / Liquor Stores*



*Convenience Stores / Small Grocery Stores*

## Space Saving Highly Integrated POS Terminal



The fully integrated SAM4s SPT-7540 POS terminal features a true flat display and includes an integrated touch screen, card reader, power supply, thermal printer, and can be configured with an available integrated barcode scanner and fingerprint reader. With a footprint only 10½" wide by 12" deep the SPT-7540 is ideal for POS applications where counter space is at a premium such as ticket offices and concessions.

- Intel® Celeron 1037U **Dual Core 1.8GHz Fanless** Processor
- 15" LCD with Resistive Touch
- Standard Integrated Thermal Receipt Printer and MCR
- Optional Integrated Barcode Scanner
- Optional Integrated **Digital Persona®** Fingerprint Reader
- Optional 2 Line by 20 Character VFD, 7", 9.7" or 15" LCD Integrated Customer Displays
- Optional WiFi Module
- Integrated Power Supplies



## Highly Integrated POS Terminal Components

### Standard Integrated Ellix 40 Printer

The compact integrated thermal receipt printer incorporates user friendly features such as anti-jam technology and drop-in paper loading.

- 220mm per second print speed.
- Stores/prints user defined graphic logos, coupons or advertising messages.
- Prints watermarks.
- Printer supports both USB and serial interfaces.
- Connects to an internal USB port or to COM3 port with included cables.

### Integrated Barcode Scanner Option

The SAM4s SPT-7540 Series can incorporate your choice of compact scanners connected to a dedicated internal USB port:

- The **1D Scanner** provides 24 scan lines in 6 scan directions at 2000 scans per second. It provides an extremely high first scan rate for all common type 1D barcodes.
- The **2D Scanner** is an omni-directional area imager bar code scanner. It uses digital imaging technology to provide intuitive and fast reading of 1D and 2D bar codes and supports advanced features like image capture deactivation. It supports up to 500mm reading depth of 1D and 2D barcode, its scan rate is up to 120 scans per second – two times faster than traditional 2D imagers. It is ideal for any retail and logistic environment.

### Integrated Fingerprint Reader Option

The self-contained U.are.U 4500 Fingerprint Reader Module from Digital Persona® optically scans the fingerprint when the user touches the glowing window. Optical technology provides the highest quality fingerprint scans and reliability.

- Blue LED (in idle mode).
- Excellent image quality.
- Latent print rejection and counterfeit finger rejection.
- Works well with dry, moist or rough fingerprints.
- Connects to a dedicated internal USB port.

### A Variety of Integrated Customer Facing Display Options

**VFD Customer Display** – Build a strong relationship with your customer by clearly displaying each item as it is registered. Customers can easily monitor the transaction as it is entered, clearly viewing the price of each item. The SAM4s display provides two lines with 20 characters per line, so that both the price and the description of the item are displayed simultaneously. With each transaction closely monitored by the customer, the opportunity for employee theft and fraud is limited.

- VFD 2 lines of 20 columns.
- 9.15mm high x 5.45mm wide character size.
- User-defined and international character set standard.
- Supports all popular emulations.
- Connects to a dedicated internal powered serial port.

**LCD Customer Displays** – SAM4s customer facing displays can be used to display transactional information such as pricing, product description, receipt totals, etc. Or use the display for customer-facing marketing like promotional messages and images. The customer facing LCD displays will display full color graphics and video via the VGA port. The displays receive power from the terminal so there is no need for a separate power adaptor “brick”.

#### 7" LCD

- 800 x 480 resolution.
- 250 cd/m2 brightness.

#### 9.7" LCD

- 1024 x 768 resolution.
- 250 cd/m2 brightness.

#### 15" LCD

- 1024 x 768 resolution.
- 250 cd/m2 brightness.



# Terminal – Ideal for POS Applications Where Counter Space is at a Premium

## Touch Terminal Specifications

<b>Processor:</b>	Intel Celeron 1037U 1.8GHz Fanless
<b>Cores / Threads:</b>	Dual Core / 2 Threads
<b>Cache Memory:</b>	2MB
<b>Bus Speed:</b>	5 GT/s (Giga Transfers per Second)
<b>Display LCD:</b>	True Flat 15" LCD with LED Backlighting
<b>Resolution:</b>	1024 x 768
<b>Brightness:</b>	Adjustable Up to 350 cd/m2
<b>Integrated Speakers:</b>	Integrated 2 Watt Speakers
<b>Chipset (PCH):</b>	NM70
<b>Touch – Panel:</b>	5-Wire Resistive Touch
<b>Reliability:</b>	Over 36 Million Touches
<b>MCR:</b>	Integrated USB Interface Triple Track MCR with Optional Encryption
<b>Hard Drive:</b>	320GB 2.5" With SATA Interface
<b>RAM Memory:</b>	2GB SODIMM DDR3 (1600MHz) Expandable To 4GB (2 Slots)
<b>Video Memory:</b>	Shared System Memory Up To 512MB
<b>Compact Flash:</b>	Optional SATA Adaptor
<b>Serial Ports – 4 External:</b>	<b>COM1, COM2, COM4</b> = DB9 With Pin 9 0V/+5V/+12V (User Selectable by BIOS) <b>COM3</b> = RJ45 Pin 1 +5V/+12V (Selectable by Jumper)
<b>2 Internal:</b>	<b>COM5</b> = Primary Touchscreen <b>COM6</b> = Customer Display Port (VFD)
<b>Parallel Port:</b>	One DB-25F
<b>USB Ports:</b>	6 V2.0 (2 Left Side of screen / 4 Bottom)
<b>Cash Drawer Port:</b>	RJ11, 12V or 24V Selectable By Jumper (Maximum 2 Drawers – Supports Open/Close)
<b>Keyboard / Mouse Port:</b>	Not Applicable (Use USB)
<b>LAN Port:</b>	RJ45 10/100/1000 Base-T (Giga LAN) RealTek RTL8111E
<b>VGA Port:</b>	One DB15F Display Port For Second LCD (Resolution Up to 2048 x 1536)
<b>Audio Port:</b>	One Line-In / One Line-Out
<b>Mic Port:</b>	One Mic-In
<b>Power Supply – Terminal:</b>	75W, 12V/6.25A 100-240V 50-60Hz Integrated Power Adaptor
<b>Printer:</b>	60W, 24V/2.5A 100-240V 50-60Hz Integrated Power Adaptor
<b>Current / Power Usage:</b>	0.28A / 31W (110V Idle Environment)
<b>Operating Temperature:</b>	32° F to 104° F (0° C to 40° C)
<b>Compatible O/S:</b>	POSReady 2009 / POSReady 7 / Windows Pro 7 / Windows Pro 8 / Windows 8 Industry Pro Windows 10 Retail / Windows 10 Pro
<b>Footprint:</b>	10-1/2"W x 12"D
<b>Dimensions:</b>	14"W x 16-7/16"H x 12-3/16"D
<b>Shipping Weight:</b>	30 lbs. (Including Standard Printer and Card Reader)
<b>Safety and EMI:</b>	FCC / CE / RoHS

The attractive, powerful SPT-7540 Series is ideal for installations where space is at a premium and customer facing applications including retail scanning and many more like these:

- Airline Counters
- Automotive Services
- Box Office
- Concession Stands
- Convenience Stores
- Delis
- Digital Signage
- Dry Cleaners
- Financial/Banking
- Food & Drug Stores
- Gaming
- Gift Shops
- Health Food
- Hospitality
- Hotel Front Desk
- Interactive Workstations
- As a Kiosk
- Liquor Stores
- Medical
- Message Stations
- Quick Service Restaurant
- Rental Car Counters
- Retail Scanning
- Self Service
- Small Grocery
- Specialty Food Nutrition
- Specialty Grocery
- Streaming Video
- Table Service Restaurant
- Ticket Booths
- Tobacco Stores
- Training
- Unattended Workstations



# SPT-7540 Touch Screen Terminal

The SAM4s SPT-7540 Modular Design Facilitates a Variety of Configurations...



Card Reader / Printer



Card Reader / Printer / Fingerprint Reader



Card Reader / Printer / Scanner + Fingerprint Reader



## Options and Upgrades

Configure your system with these easy to add options:

- Integrated VFD Customer Display – 2 Lines x 20 Characters
- Integrated 7", 9.7" or 15" LCD Customer Displays
- Integrated Encrypting Triple Track Card Reader
- Integrated 1D or 2D Scanner
- Integrated Fingerprint Reader
- Integrated Scanner + Fingerprint Reader
- WiFi Module
- Solid State Drive
- SATA Compact Flash Adaptor

## Connectivity

- A** DC-Out (12V) (For Rear or Remote LCD)
- B** COM4 (Powered)
- C** COM3 (Powered)
- D** COM2 (Powered)
- E** LAN
- F** Line-In
- G** Line-Out
- H** Parallel
- I** VGA (For Rear or Remote Display)
- J** USB (2)
- K** COM1 (Powered)
- L** USB (2)
- M** Mic-In
- N** Cash Drawer

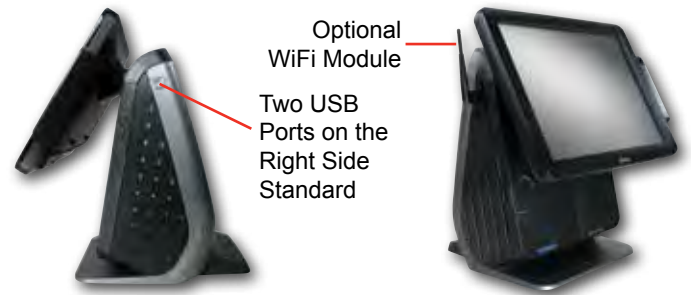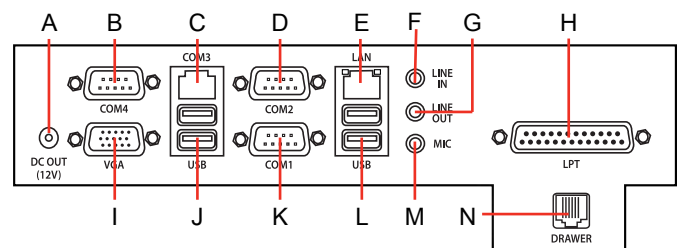

Optional Integrated 15" LCD Customer Display



Optional Integrated 9.7" LCD Customer Display



Optional Integrated 7" LCD Customer Display



Optional Integrated VFD Customer Display



All product and company names are trademarks, service marks or registered trademarks of their respective owners. All product features are subject to change without notice.