
HiStone

HS710



HS710 Self Checkout System

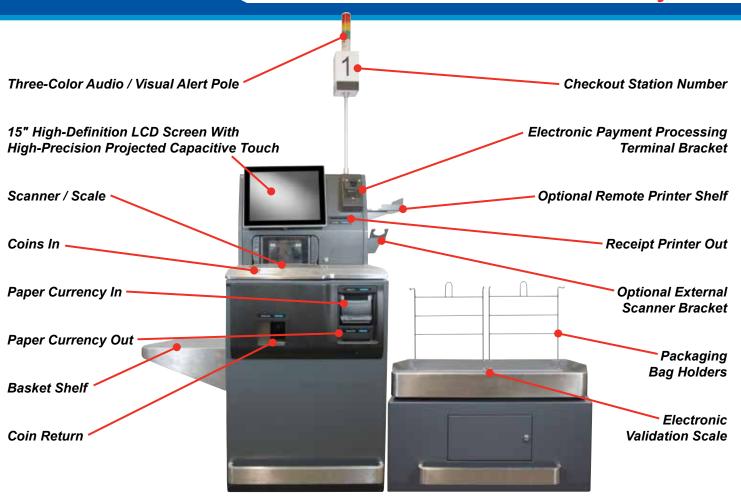

Specifications

Histone Model HS710

CPU: Intel i3 6100U

Memory: 8GB

Mass Storage Device: 128GB 2.5" Solid State Drive

Serial Ports: 6
USB Ports: 6

Histone MD15VC Display

Display LCD: 15" High-Definition LCD Screen

Touch Panel: Projected Capacitive Touch

Datalogic Model Magellan 9300i Scanner / Scale

1D Barcodes: Supports Reading / Re-Reading

of All Standard 1D Barcodes

2D Barcodes: Aztec Code / Data Matrix / QR

Code / Micro QR Code

Tone: Adjustable Volume
Minimum Increment: 0.010 lb. (0.005 kg)

Scale Capacity: 0 - 30.0 lbs. (0 - 15.0 kg)

Qlight Model ST45L Alert Pole

Color: Red / Yellow / Green

Alert: Audible Alarm

High Capacity Thermal Kiosk Printer

Print Width: 80mm

Emulations: Custom / POS
Paper Thickness: 63 ~ 88 μm

Print Speed: 130mm per Second

Printhead Life: 100Km

Cutter Life: 1,000,000 Cuts
Barcode Type: 1D Code / 2D Code

Money Control BCR206 Coin Recycling Module

Processing Mode: Accepts and Recycles Coins per

Transaction

Number of Single Coin: Up to 100

Troubleshooting: Smart Card / Coin Detection &

Removal

Coin Replenishment: Manual Coin Replenishment or

Smart Coin Replenishment from

the Coins Received

MEI Model BNR Bill Recycling Module

Cashbox Capacity: 600 Loader Cassette Cap.: 250

Bill Width: 60~80mm

Bill Recycling Units: 4

Recycling Units Cap.: 30 55 30 55

Tscale Model PB4560/PB6080 Electronic Validation Scale

Range: Up to 132.25 lbs. or 264.5 lbs.

Maximum Error: .35 oz.
Environmental Requirements

Operating Voltage: 88 ~ 264VAC

Power Consumption: Average – 90W / Peak – 250W

Operating Temperature: 50° ~ 104° F

Storage Temperature: - 4° ~ 122° F

Operating Humidity: 25% ~ 90% RH (Non-Condensing) Storage Humidity: 0% ~ 93% RH (Non-Condensing)

